



*AUTOMOBILE ABRASIVES
SOULTION*



Abrasive Solution For Vehicles



Bodywork

- 1** Abrasive process for bodywork repairs

Paint

- 2** Abrasive process before applying primer filler
- 3** Abrasive process after applying primer filler
- 4** Spot repair



Finishing

- 5** **Abrasive process for lacquer reworking**
Dust ingress
Paint runs
Orange-peel effect
- 6** **Polishing process for an excellent surface quality**






We are passionate about professional abrasive solutions for industry and trades.

Our clearly defined abrasive processes for all materials and applications mean that we can always find the right approach to achieving the perfect surface finish.

Make Your Polishing Easier, We Know How!



CONTENTS

<i>Abrasives Discs</i>		7
<i>Abrasives</i>		28
<i>Abrasives ponge</i>		34
<i>Non Woven</i>		39
<i>Polihing Wool</i>		43

SAFETY STANDARD

STORAGE



Abrasive products must be stored in places with a temperature of approximately 20°C (68°F) and relative humidity of approximately 65%. It is important to avoid storing abrasive products near heat sources and in very humid places.



SAFETY

Every operator must be protected by glasses, gloves and protective cloths against the possibility of material being projected as well as anti-dust masks and hearing protection. The use of these tools can cause noise equal or superior to 85 dBA, which may result in loss of hearing; the operator must therefore wear protective ear muff or other suitable personal protections.



Refer to instruction manual / booklet



Wear ear protection



Wear eye protection



Wear a mask



Wear protective gloves



Do not use a damaged abrasive wheel



Do not use with hand-held machine



Do not use for wet grinding and cutting-off



Do not use for grinding



Only suitable for wet cutting-off



*AUTOMOBILE ABRASIVES
SOULTION*



DISC INTRO

ABRASIVE MATERIALS

- GENERAL** Abrasive paper.
- FREE DUST** Aluminium oxide abrasive net.
- FINEFLEX** Extra flexible polymer film.
- FILM** PET film.
- BLITZ** Film on self-adhesive backing.
- FMST** Fabric on hook & loop sponge.


SHAPES

- D** Disc

BACKINGS


- VEL** Hook & loop velour applied on the back.
- SOF** Flexible foam applied on the back.
- PSA** Pasted sticker adhesive

HOLE S TYPES



Other holes available on request

GOLD HOOK & LOOP ABRASIVES DISC

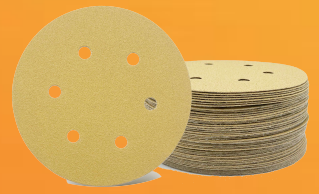

Benefits

Full resin bonded aluminum oxide grains with anti-clogging additive, C weight latex paper backing - open coating. For dry orbital sanding operations. Very low clogging. Long life.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000	
GOLD	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT




Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin
AC With anti-clogging additive


PLATINUM HOOK & LOOP ABRASIVES DISC

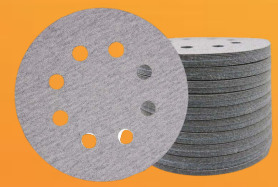

Benefits

Full resin bonded aluminum oxide grains with anti-clogging additive, C weight latex paper backing - open coating. For dry orbital sanding operations. Very low clogging. Long life.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000	
PLA	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	AC	C-WT

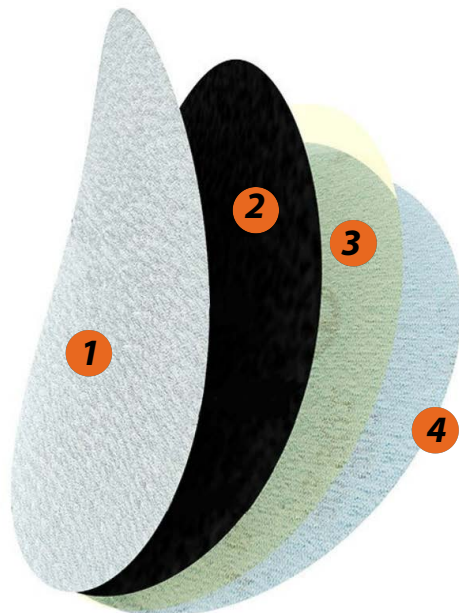


- 1 Grains
- 2 Resin Bond
- 3 Paper Basement
- 4 Velcro Farbic

Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin
AC With anti-clogging additive

PP771 HOOK & LOOP ABRASIVES DISC

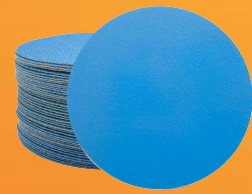

Benefits

Full resin bonded ceramic grains, antistatic, D weight latex backing, open coating. Aggressive and long life. Smoothing of metal surfaces before painting.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000	
PP771	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	D-WT
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	D-WT
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	D-WT
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	D-WT
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	D-WT



Explanation

S Ceramic
OP Open Coated

RR Resin Over Resin

NC258 HOOK & LOOP ABRASIVES DISC



Benefits

Full resin bonded calcine aluminum oxide grains, antistatic, Flex film backing, open coating. Aggressive and long life. Smoothing of metal surfaces before painting.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing				
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000		
NC258	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	CA	OP	RR	AC	FILM
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	CA	OP	RR	AC	FILM
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	CA	OP	RR	AC	FILM
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	CA	OP	RR	AC	FILM
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	CA	OP	RR	AC	FILM



Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin
AC With anti-clogging additive

FILM PET Film


NC238 HOOK & LOOP ABRASIVES DISC



Benefits

Full resin bonded ceramic grains with anti-clogging additive, Flex film backing, open coating. Aggressive and long life. Smoothing of metal surfaces before painting.

Products	Dimensions	Grits																Abrasive	Coating	Adhesive	Backing	
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000					
NC238	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	FILM
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	FILM
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	FILM
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	FILM
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	S	OP	RR	AC	FILM

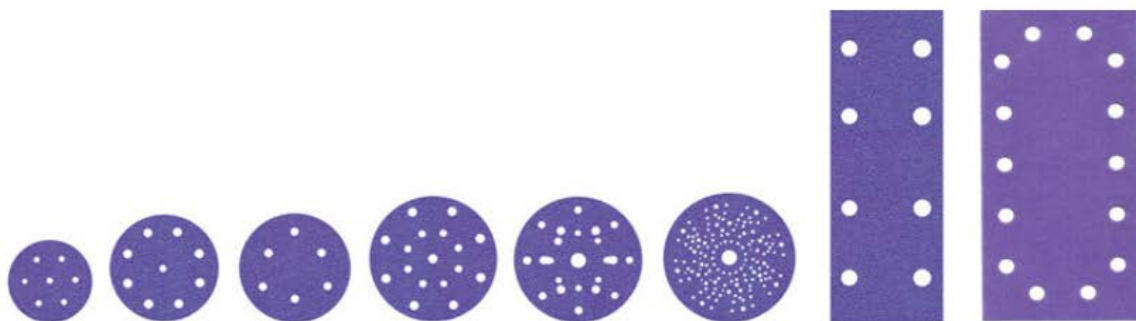

Explanation

S Ceramic

OP Open Coated


RR Resin Over Resin

AC With anti-clogging additive

FILM

PET Film

RHOMBUS BLUE HOOK & LOOP ABRASIVES DISC

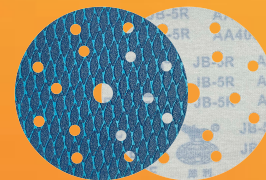

Benefits

Full resin bonded aluminum oxide grains with specially interval coating, Strong J weight cotton backing, open coating. Aggressive and prevent loading .

Products	Dimensions	Grits																Abrasive	Coating	Adhesive	Backing	
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000					
RHO	Ø 100	•	•	•	•	•	•	•	•	•								A	OP	RR	■	CLOTH
	Ø 115	•	•	•	•	•	•	•	•	•								A	OP	RR	■	CLOTH
	Ø 125	•	•	•	•	•	•	•	•	•								A	OP	RR	■	CLOTH
	Ø 150	•	•	•	•	•	•	•	•	•								A	OP	RR	■	CLOTH
	Ø 225	•	•	•	•	•	•	•	•	•								A	OP	RR	■	CLOTH




Explanation

A Aluminum Oxide
OP Open Coated

RR Resin Over Resin

CLOTH j weight cotton cloth

NC208 HOOK & LOOP ABRASIVES DISC



Benefits

Full resin bonded ceramic grains , Flex latex paper backing, open coating. Aggressive and long life. Smoothing of metal surfaces before painting.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing				
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000		
NC208	Ø 100	•	•	•	•	•	•	•	•	•	•	•	•						S	OP	RR	■	C-WT
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	•						S	OP	RR	■	C-WT
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	•						S	OP	RR	■	C-WT
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	•						S	OP	RR	■	C-WT
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	•						S	OP	RR	■	C-WT



Explanation

S Ceramic

RR Resin Over Resin

OP Open Coated

SUPERFLEX ABRASIVES DISC



Benefits

Disc on extra-flexible polymer film for the removal of painting defects and for super-finishing. The disc combines a high cutting capacity with an excellent and uniform finish without scratches. Only for dry used.

Products	Dimensions	Grits										Abrasive	Coating	Adhesive	Backing	
		320	400	600	800	1000	1200	1500	2000	2500	3000					5000
S-FLEX	Ø 100	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	FILM
	Ø 115	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	FILM
	Ø 125	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	FILM
	Ø 150	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	FILM
	Ø 225	•	•	•	•	•	•	•	•	•	•	•	A	OP	RR	FILM




Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin

FILM PET Film

NT775 HOOK & LOOP ABRASIVES DISC

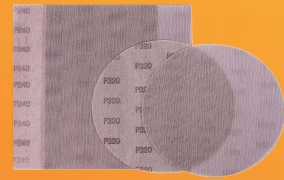

Benefits

Special mesh sandscreen for excellent dust-free sanding effect, high cutting capacity and long service life. Suitable for filler, lacquers, paint sanding. More health.

Products	Dimensions	Grits															Abrasive	Coating	Adhesive	Backing	
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500					2000
NT775	Ø 100			•	•	•	•	•	•	•	•	•	•					A	OP	RR	Fiber
	Ø 115			•	•	•	•	•	•	•	•	•	•					A	OP	RR	Fiber
	Ø 125			•	•	•	•	•	•	•	•	•	•					A	OP	RR	Fiber
	Ø 150			•	•	•	•	•	•	•	•	•	•					A	OP	RR	Fiber
	Ø 225			•	•	•	•	•	•	•	•	•	•					A	OP	RR	Fiber



Explanation

A Aluminum Oxide

RR Resin Over Resin

OP Open Coated

TRIZACT ABRASIVES DISC



Benefits

Precisely shaped pyramids wear away continually exposing fresh abrasives tips, that is the clear coat spot repair disc for automobile glass defect repair, corian and acrylic solid surface finishing.

Products	Dimensions	Grits				Abrasive	Coating	Adhesive	Backing
		A3	A5	A7	A12				
Trizact	Ø 32	•	•	•	•	A	OP	RR	AC FILM




Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin

FILM PET Film

FIBERAT-Z INDUSTRY ZIRCONIA FIBER DISC

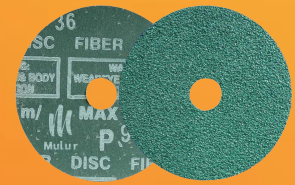

Benefits

Zirconia abrasive disc with cooling additive, closed coating. Excellent for removal of paints, lacquers and rust. Ideal for use on materials that clog.

Products	Dimensions	Grits							Abrasive	Coating	Adhesive	Backing	
		16	24	36	40	80	100	120					
FIBER-Z	∅ 100x16	•	•	•	•	•	•	•	Z	CL	RR	AC	VF
	∅ 115x22	•	•	•	•	•	•	•	Z	CL	RR	AC	VF
	∅ 125x22	•	•	•	•	•	•	•	Z	CL	RR	AC	VF
	∅ 150x22	•	•	•	•	•	•	•	Z	CL	RR	AC	VF
	∅ 180x22	•	•	•	•	•	•	•	Z	CL	RR	AC	VF



Explanation

Z Zirconia

CL Close Coated

RR Resin Over Resin

AC With anti-clogging additive

VF Vulcanized Fiber Backing



Benefits

Ceramic abrasive disc with cooling additive, closed coating. Excellent for removal of paints, lacquers and rust. Ideal for use on materials that clog.

Products	Dimensions	Grits							Abrasive	Coating	Adhesive	Backing	
		16	24	36	40	80	100	120					
FIBER-S	∅ 100x16	•	•	•	•	•	•	•	S	CL	RR	AC	VF
	∅ 115x22	•	•	•	•	•	•	•	S	CL	RR	AC	VF
	∅ 125x22	•	•	•	•	•	•	•	S	CL	RR	AC	VF
	∅ 150x22	•	•	•	•	•	•	•	S	CL	RR	AC	VF
	∅ 180x22	•	•	•	•	•	•	•	S	CL	RR	AC	VF



Explanation

S Ceramic

CL Close Coated

RR Resin Over Resin

AC With anti-clogging additive


VF Vulcanized Fiber Backing

INTRO

Konaflex offers a wide range of flap discs specifically designed for different application fields and the result of 25 years of experience in the production of abrasive cloths.

Here is a selection of products frequently used in the automotive industry. For a complete presentation of the range, please refer to the catalogue for metal working

DIMENSIONS



BACKINGS

Fibre glass




Polymer



SHAPES



Flat shape with flat backing



Bevel shape with conical backing

ALUMINUM OXIDE FLAP DISC



Benefits | Premium aluminum oxide grain, high stock removal, application for wood, iron, steel.

Products	Dimensions	Grits				Abrasive	Backing	Adhesive
		40	60	80	120			
51B	100x 16	•	•	•	•	A	6+1 Fiber	RR
	115 x 22,23	•	•	•	•	A	7+1 Fiber	RR
	125 x 22,23	•	•	•	•	A	8+1 Fiber	RR
	180x 22,23	•	•	•	•	A	10+1 Fiber	RR



Explanation

A Aluminum Oxide

RR Resin Over Resin

ZIRCONIA FLAP DISC



Benefits | High performance zirconia grain, high stock removal, application for general metal, carbon steel, stainless steel, alloy steel, hard alloy.

Products	Dimensions	Grits				Abrasive	Backing	Adhesive
		40	60	80	120			
765z	100x 16	•	•	•	•	Z	6+1 Fiber	RR
	115 x 22,23	•	•	•	•	Z	7+1 Fiber	RR
	125 x 22,23	•	•	•	•	Z	8+1 Fiber	RR
	180x 22,23	•	•	•	•	Z	10+1 Fiber	RR



Explanation

Z Zirconia

RR Resin Over Resin

CERAMIC FLAP DISC



Benefits

Aggressive sharp ceramic grain with top coating, high stock removal, application for soft metal, such as aluminum, zinc alloy, cooper.

Products	Dimensions	Grits				Abrasive		Backing	Adhesive
		40	60	80	120	S	AC		
850SG	100x 16	•	•	•	•	S	AC	6+1 Fiber	RR
	115 x 22,23	•	•	•	•	S	AC	7+1 Fiber	RR
	125 x 22,23	•	•	•	•	S	AC	8+1 Fiber	RR
	180x 22,23	•	•	•	•	S	AC	10+1 Fiber	RR



Explanation

SG Ceramic

RR Resin Over Resin

AC With cooling top coating

CERAMIC-SG FLAP DISC



Benefits

Aggressive sharp ceramic grain with top coating, high stock removal, application for hard alloy, stainless steel, alloy.

Products	Dimensions	Grits				Abrasive	Backing	Adhesive
		40	60	80	120			
721SG	100x 16	•	•	•	•	SG AC	6+1 Fiber	RR
	115 x 22,23	•	•	•	•	SG AC	7+1 Fiber	RR
	125 x 22,23	•	•	•	•	SG AC	8+1 Fiber	RR
	180x 22,23	•	•	•	•	SG AC	10+1 Fiber	RR




Explanation

SG Ceramic

RR Resin Over Resin

AC With cooling top coating

ROLOC SANDING DISC

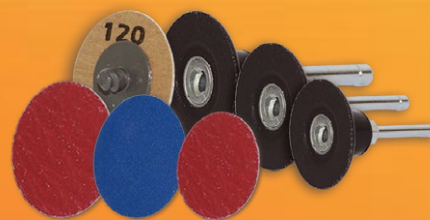

A Filled. High performance. High abrasive power. Low heat generation and low clogging
 ■ steel, cast iron, ferrous metals

Z Filled. High performance. High abrasive power. Low heat generation and low clogging
 ■ steel, cast iron, ferrous metals

S Top-filled. High performance. High abrasive power. Low heat generation and low clogging.
 ■ stainless steels, alloy steels, aluminium, steels

Products	Diameter	Mounting system	Grits					Abrasive	Adhesive	Coating	
			36	40	60	80	120				
A	38		•	•	•	•	•	A	RR	CL	
	50		•	•	•	•	•	A	RR	CL	
	75		•	•	•	•	•	A	RR	CL	
Z	38		•	•	•	•	•	Z	RR	CL	
	50		•	•	•	•	•	Z	RR	CL	
	75		•	•	•	•	•	Z	RR	CL	
S	38		•	•	•	•	•	S	RR	TF	CL
	50		•	•	•	•	•	S	RR	TF	CL
	75		•	•	•	•	•	S	RR	TF	CL

DISC HOLDER

TR- MOUNTING SYSTEM



Screw connection with male thread (polymer)

DISC HOLDER	Ø 38
	Ø 50
	Ø 75



Explanation

- A** Aluminum Oxide
- Z** Zirconia
- S** Ceramic
- RR** Resins
- TF** Top filled
- CL** Closed



*AUTOMOBILE ABRASIVES
SOULTION*



KNA347 WATERPROOF SANDPAPER



Benefits

Full resin bonded aluminum oxide grains, Flex D-wt latex paper backing, open coating. For hand and orbital wet & dry used, low clogging.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000					
KNA347	230 X 280 MM	A	OP	RR	■	D-WT



Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin

TMG941 WATERPROOF SANDPAPER



Benefits

Full resin bonded silicon carbide grains, Flex c-wt latex paper backing, closed coating. For hand and orbital wet & dry used.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000					
TMG941	230 X 280 MM	C	CL	RR	■	C-WT



Explanation

C Silicon carbide
CL Closed Coated

RR Resin Over Resin

SUPER FLEXIBLE TPU SANDPAPER



Benefits

Sheets on extra-flexible polymer film for the removal of painting defects and for super-finishing. The sheets combines a high cutting capacity with on excellent and uniform finish without scratches. Only for dry used.

Products	Dimensions	Grits										Abrasive	Coating	Adhesive	Backing	
		320	400	600	800	1000	1200	1500	2000	2500	3000	5000				
S-FLEX	230 X 280 MM	A	OP	RR	FILM



Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin

FILM PET Film


TMG952 NO LOADING SANDPAPER



Benefits

Full resin bonded aluminum oxide grains with zin-stearate, Flex c-wt kraft paper backing, open coating. For hand and orbital dry used only.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing			
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000					
TMG952	230 X 280 MM	A	OP	RR	AC	C-WT

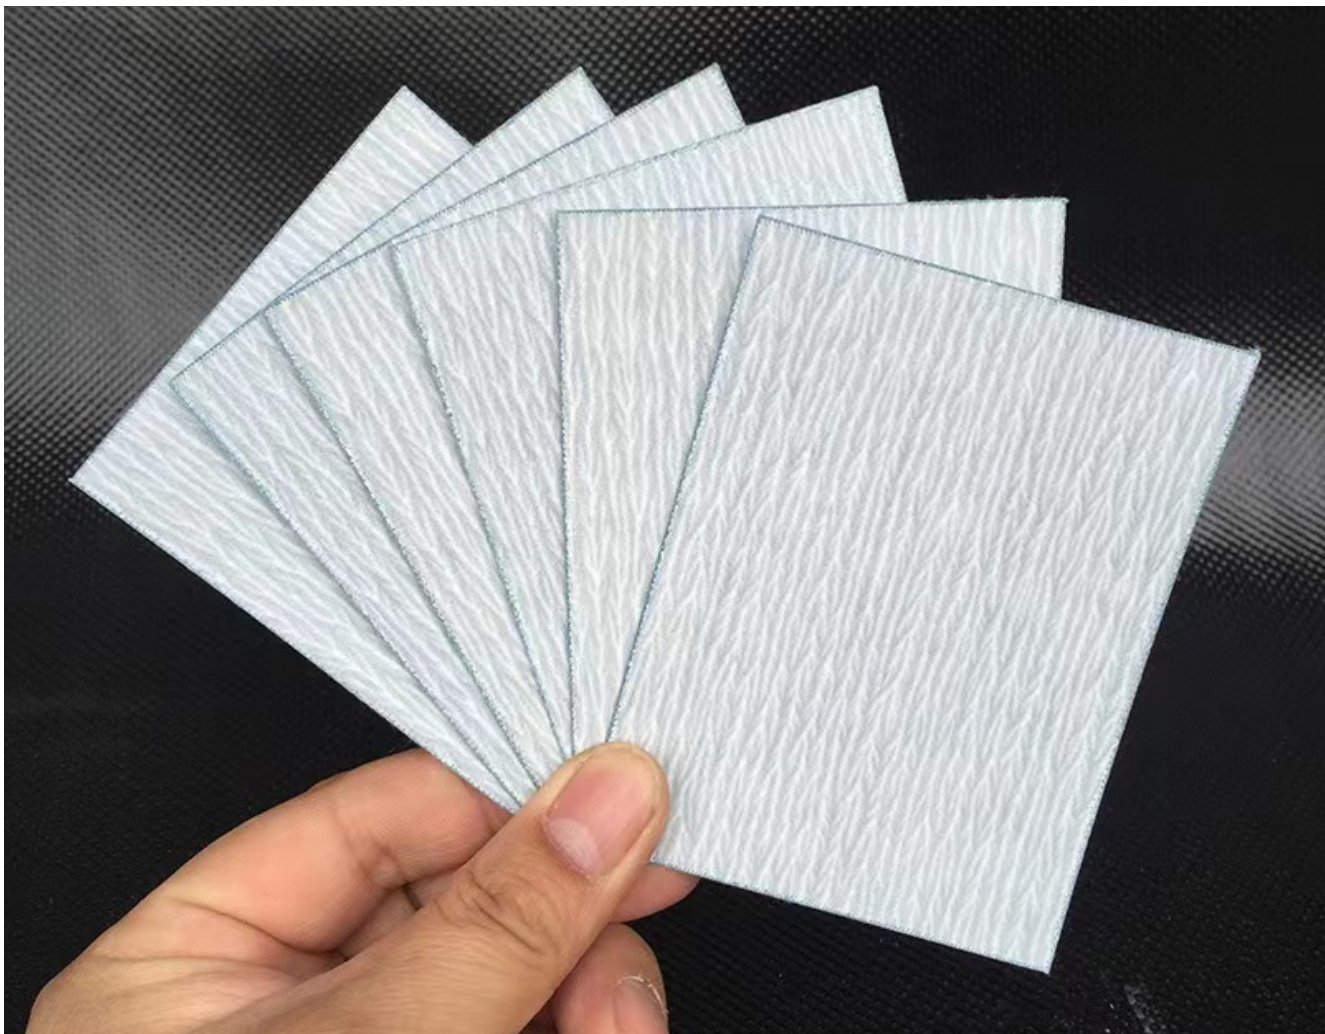

Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin

AC Anti Clogging Additive

N215 MESH SCREEN SANDPAPER



Benefits

Full resin bonded silicon carbide grains, Special net mesh screen fiber backing, open coating. For hand and orbital wet & dry used. Can be washed and reused.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing		
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200	1500	2000				
N215	70 X 198MM							C	OP	RR	Fiber



Explanation

C Silicon carbide
OP Open Coated

RR Resin Over Resin




*AUTOMOBILE ABRASIVES
SOLUTION*



ABRASIVES SPONGES

SANDING SPONGE

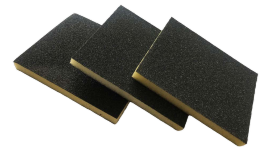

F2 SANDING FOAM

Benefits

Silicon carbide grains on low density soft sponge, 2 side coating, for finishing hand operations on profiles, edges and shaped workpieces.

Products	Dimensions	Grits			Abrasive	Coating	Basement	Backing
		Coarse-60	Medium-100	Fine-180				
F2	120X100X12MM	•	•	•	C	CL	LATEX PU	FOAM



F1 SANDING FOAM

Benefits

Aluminum oxide grains on high density soft sponge, 1 side coating, for finishing hand operations on profiles, edges and shaped workpieces.

Products	Dimensions	Grits					Abrasive	Coating	Basement	Backing
		Medium 180-240	Fine 320-400	Super Fine 500-600	Ultra Fine 800-1000	Micro Fine 1200-1500				
F1	120X100X12MM	•	•	•	•	•	A	CL	LATEX PU	FOAM

Explanation

C Silicon carbide

CL Closed Coated

A Aluminum Oxide

SANDING SPONGE ROLL



FR-G



FR-S

FR-G

Benefits

Full resin bonded aluminum oxide grains with zin-stearate, Latex PU basement with low density sponge, open coating. High flexible for hand and orbital used .

FR-S

Benefits

Full resin bonded ceramic grains with transparent zin-stearate, Latex PU basement with low density sponge, open coating. High flexible for hand and orbital used .

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing		
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000
FR-G	115X 125 mmx200pcs		•	•	•	•	•	•	•	•	•	•	•				A	OP	RR	AC	FOAM
FR-S	115X 125 mmx200pcs		•	•	•	•	•	•	•	•	•	•	•				S	OP	RR	AC	FOAM



Explanation

A Aluminum oxide
OP Open Coated

RR Resin Over Resin
S Ceramic Grains

AC Anti Clogging Additive

COMPOUND POLISHING SPONGE



Benefits

High density sponge with ABS plastic backing, the pad should be properly soaked before used, usually collocation with polishing agent and wax to used.

Products	Dimensions	Grits			Abrasive	Coating	Basement	Backing
		Soft-Black	Medium-Orange	Hard-White				
CP	150 X 45MM X M10/M14	•	•	•				FOAM



GLASS REPAIR SPONGE



FNT



FPU

FNT

Benefits

Full resin bonded silicon carbide grains , mesh screen basement with high density sponge, open coating. High cutting force to repair and brightness glass on automobile.

FPU

Benefits

Full resin bonded aluminum oxide grains , PU basement with high density sponge. High flexible and long lasting. Must be collocation with polishing agnet to used.

Products	Dimensions	Grits														Abrasive	Coating	Adhesive	Backing		
		40	60	80	100	120	150	180	240	320	400	600	800	1000	1200					1500	2000
FNT	∅ 125			•	•	•	•	•	•	•	•	•	•	•	•	•	•	C	OP	RR	FOAM
FPU	∅ 75																			PU	FOAM



Explanation

C Silicon carbide

OP Open Coated

RR Resin Over Resin



*AUTOMOBILE ABRASIVES
SOULTION*



NON WOVEN

NON WOVEN HAND PADS



Benefits

High flexible fiberglass mixed with grains, open coating. Open structure, elastic grinding, low clogging and prevent damage for workpiece surface. For hand and orbital wet & dry used.

Products	Dimensions	Equivalent	Grits	Application	Abrasive	Coating	Adhesive	Backing
7800	150 X 230MM	7440	Coarse--#150	Heavy Rust Removal	C	OP	RR	D-WT
7801	150 X 230MM	8698	Coarse--#180-240	Cleaning & Deburring	A	OP	RR	D-WT
7802	150 X 230MM	7447	Medium-#320	General Purpose	A	OP	RR	D-WT
7806	150 X 230MM	7521	Very Fine-#400	Surface Condition	A	OP	RR	D-WT
7808	150 X 230MM	7448	Ultra Fine-#600	Surface Finished	C	OP	RR	D-WT

PERFORMANCE REFERENCE



Explanation

A Aluminum oxide
OP Open Coated

C Silicon Carbide

RR Resin Over Resin


VN701 VELCRO NON WOVEN DISC



Benefits

High flexible fiberglass mixed with grains, open coating, strong velcro backing. Open structure, elastic grinding, low clogging and prevent damage for workpiece surface. For orbital used from roughing to finishing.

Products	Dimensions	Grits			Abrasive	Coating	Adhesive	Backing	
		Coarse--Green	Medium--Maroon	Fine--Grey					
VN701	Ø 75	•	•	•	A	C	OP	RR	FIBER
	Ø 100	•	•	•	A	C	OP	RR	FIBER
	Ø 125	•	•	•	A	C	OP	RR	FIBER

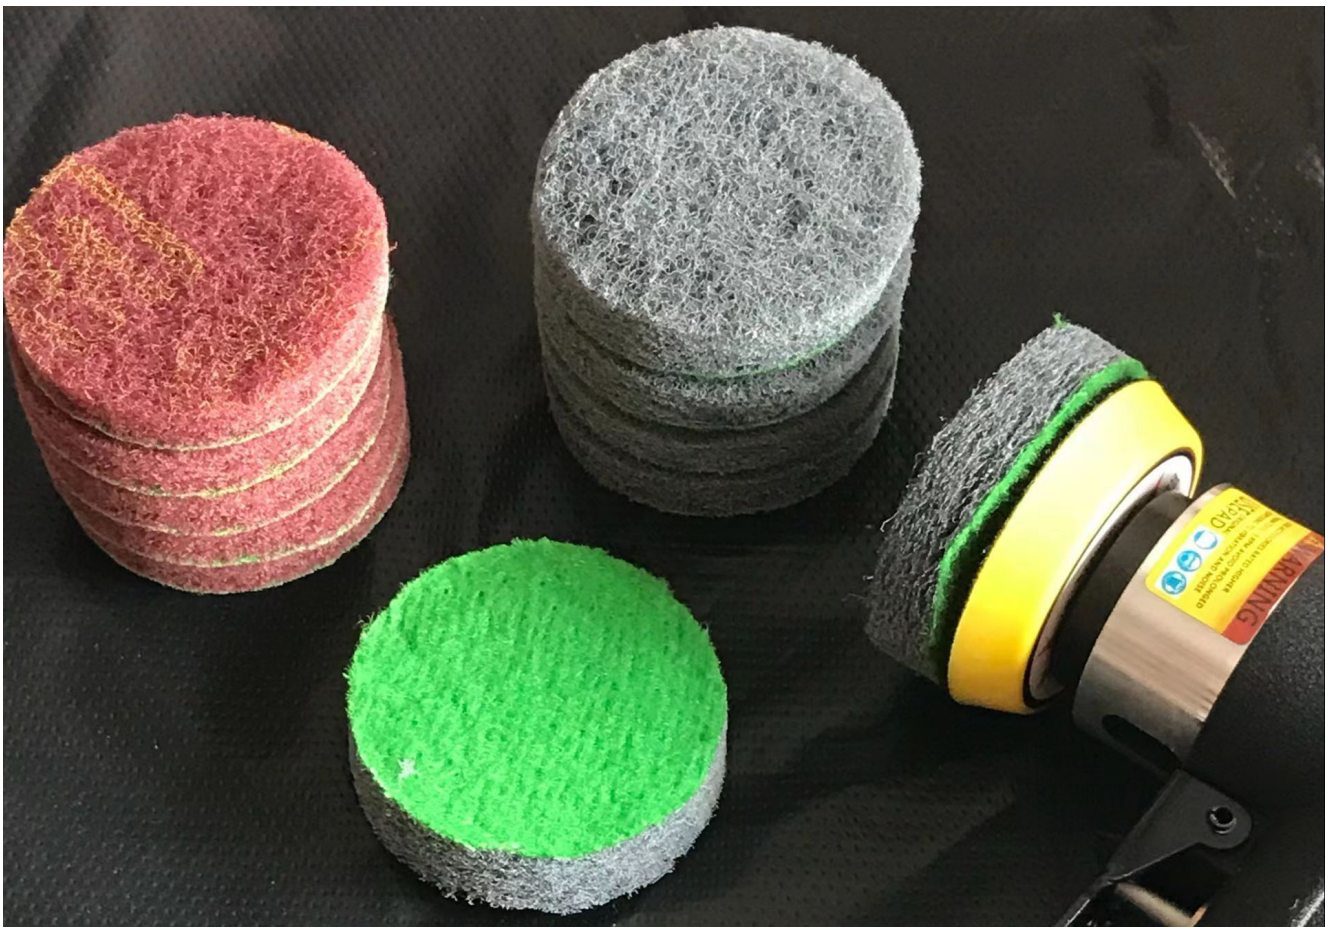

Explanation

A Aluminum oxide
OP Open Coated

C Silicon Carbide

RR Resin Over Resin

SURFACE CLEANING & STRIP DISC



Benefits

High flexible fiberglass mixed with grains, open coating. Open structure, elastic grinding, low clogging and prevent damage for workpiece surface. Usually used for rust, paint removal.

Products	Dimensions	Grits				Abrasive	Coating	Adhesive	Backing	
		Black	Blue	Purple	Orange					
STRIP	Ø 100	•	•	•	•	A	C	OP	RR	FIBER
	Ø 115	•	•	•	•	A	C	OP	RR	FIBER
	Ø 125	•	•	•	•	A	C	OP	RR	FIBER



Explanation

A Aluminum oxide
OP Open Coated

C Silicon Carbide
S Ceramic

RR Resin Over Resin



*AUTOMOBILE ABRASIVES
SOULTION*



POLISHING WOOL BONNET



Benefits

100% Natural wool with velcro backing, prime quality, washable and reuseable. High brightness, uniform finished, without causing damage.

Products	Dimensions	Material	Backing
BONNET	Ø 100	NATURAL WOOL	VELCRO
	Ø 125	NATURAL WOOL	VELCRO
	Ø 180	NATURAL WOOL	VELCRO



POLISHING WOOL PADS



Benefits

100% Natural wool with velcro backing, prime quality, washable and re-useable. High brightness, uniform finished, without causing damage.

Products	Dimensions	Material	Backing
PADS	Ø 100	NATURAL WOOL	VELCRO
	Ø 125	NATURAL WOOL	VELCRO
	Ø 180	NATURAL WOOL	VELCRO



POLISHING WOOL FELT



Benefits

100% Natural wool with velcro backing, prime quality, washable and re-useable. High brightness, uniform finished, without causing damage.

Products	Dimensions	Material	Backing
FELT	Ø 100	NATURAL WOOL	VELCRO
	Ø 125	NATURAL WOOL	VELCRO
	Ø 180	NATURAL WOOL	VELCRO

